




► **Materials**

► **Applications**

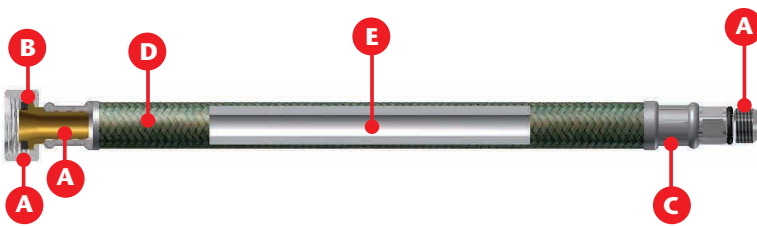

DN8 TAQ GRIF

- A.** Brass CW617N
- B.** Incorporated EPDM washer
- C.** Stainless steel AISI304
- D.** Stainless steel braided AISI 304
- E.** EPDM

DN8 TAQ GRIF ACB

- A.** Brass CW617N
- B.** Incorporated EPDM washer
- C.** Stainless steel AISI304
- D.** Polymer braided
- E.** EPDM



CONNECTING SOLUTION FOR FAUCET APPLICATIONS



Taq Grif



Taq Grif ACB



STAINLESS STEEL BRAIDED

- Outer diameter: 12 mm
- Inner diameter: 8 mm
- Fitting inner diameter: 6 mm
- Flow rate: 29 l./min
- Minimum bending radius: 30 mm
- Working pressure: 10 bar
- Temperature 90 °C
- H₂O potable



POLYMER BRAIDED

- Outer diameter: 12 mm
- Inner diameter: 8 mm**
- Fitting inner diameter: 6,2 mm
- Flow rate: 29 l./min
- Minimum bending radius: 25 mm
- Working pressure: 10 bar
- Temperature 90 °C
- H₂O potable



FEMALE - MALE

(10x1 = male size, another sizes availables. L = male length)

Fittings	Ø inner (mm)	Ø Fitting Inner (mm)	Package		Length (mm)
			uts./bag	uts./box	
H 3/8" - M 10x1 - L17	8	6	10	100	300
					400
					500
H 3/8" - M 10x1 - L37	8	6	10	100	300
					400
					500
H 3/8" - M 10x1 - L50	8	6	10	100	300
					400
					500